

ADDENDUM No. 1 – (September 21, 2016)

ADDENDUM TO: Locker Room Subroof Repair, RJS
REBID NUMBER: 15-12
REBID DUE DATE: Thursday, September 29, 2016 not later than 10:00am

TO BIDDER: This addendum is an integral part of the Bid file under consideration by you as a bidder in connection with the subject matter identified above. For the purpose of clarification the following additions, changes, modifications and replacements noted below have been made to the Bid and have been made to the Bid file which bears the above title.

Bids submitted shall conform to these additions and modifications noted herein and including all issued addendums.

CLARIFICATIONS/RESPONSES

SEE ATTACHED DOCUMENTS

Note: To qualify your proposal, of which this addendum becomes a part, this form must be completed and returned to this office with the proposal.

Date: _____

Authorized Signature of Company Rep.


Printed Name of Company Rep.


Company: _____
Address: _____
Telephone: _____
Contact's Email: _____

ADDENDUM ONE to
Locker Room Sub Roof Repair
REBID #15-12

1. The four attached drawings shall become part of the bid documents.
2. For additional clarity, dimensions of the outside wall of the locker room area on the drawings is as follows from south to north (north pointing to the right side of the page): 10'6", 15', 157'1", 44' and 157' 1".
3. Commercial box style guttering shall be fabricated from .032" aluminum with baked enamel finish. Top edge of gutter where it attaches to block wall shall be caulked.
4. Base flashing shall be 6"x 6" L shaped 10 gauge galvanized metal.
5. Caulk shall be siliconized acrylic, suitable for use on both metal and concrete surfaces. Both edges of flashing shall be caulked and top of slab that receives flashing shall be cleaned of dirt, debris and excess mortar prior to application.

END OF ADDENDUM

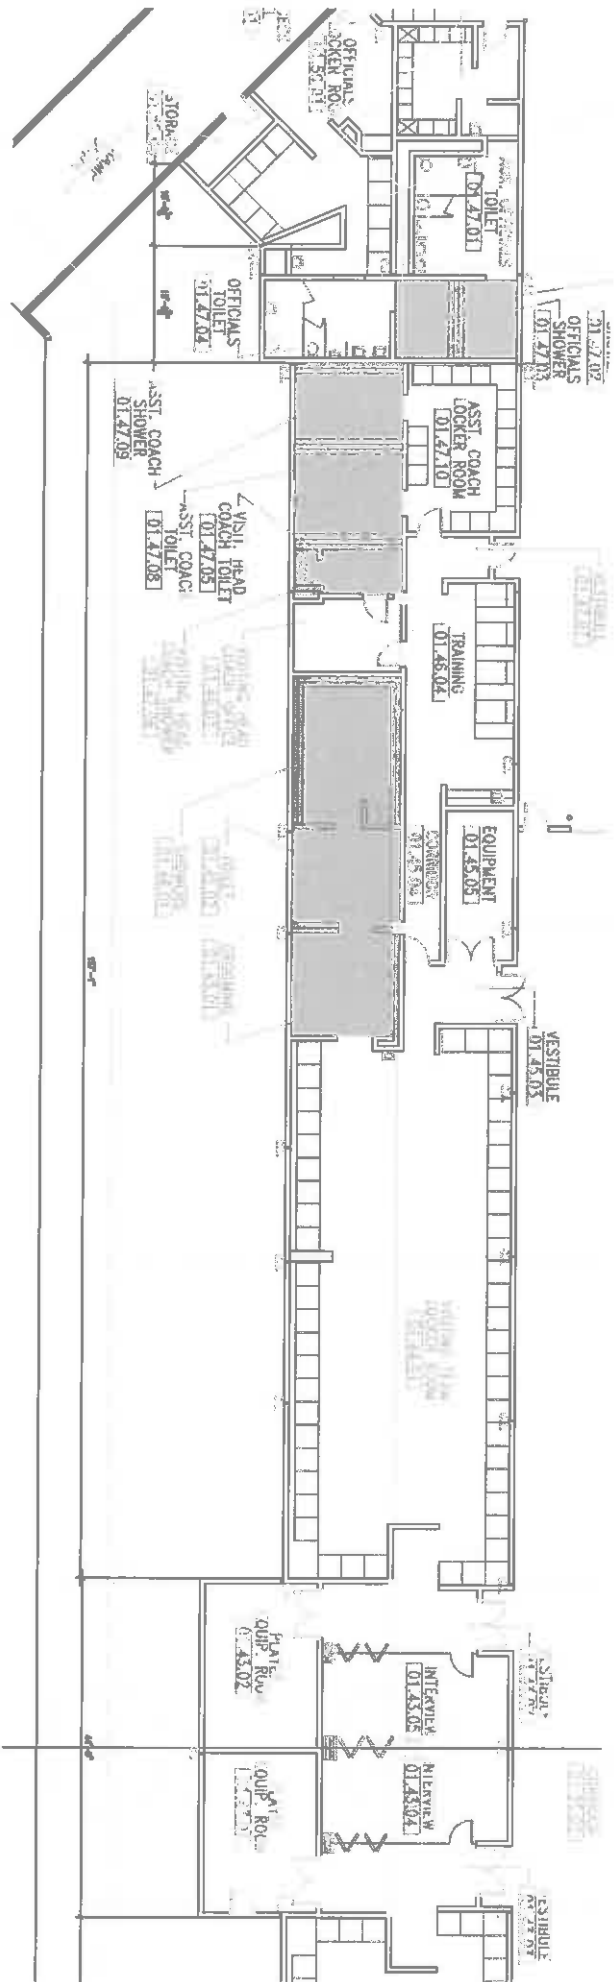

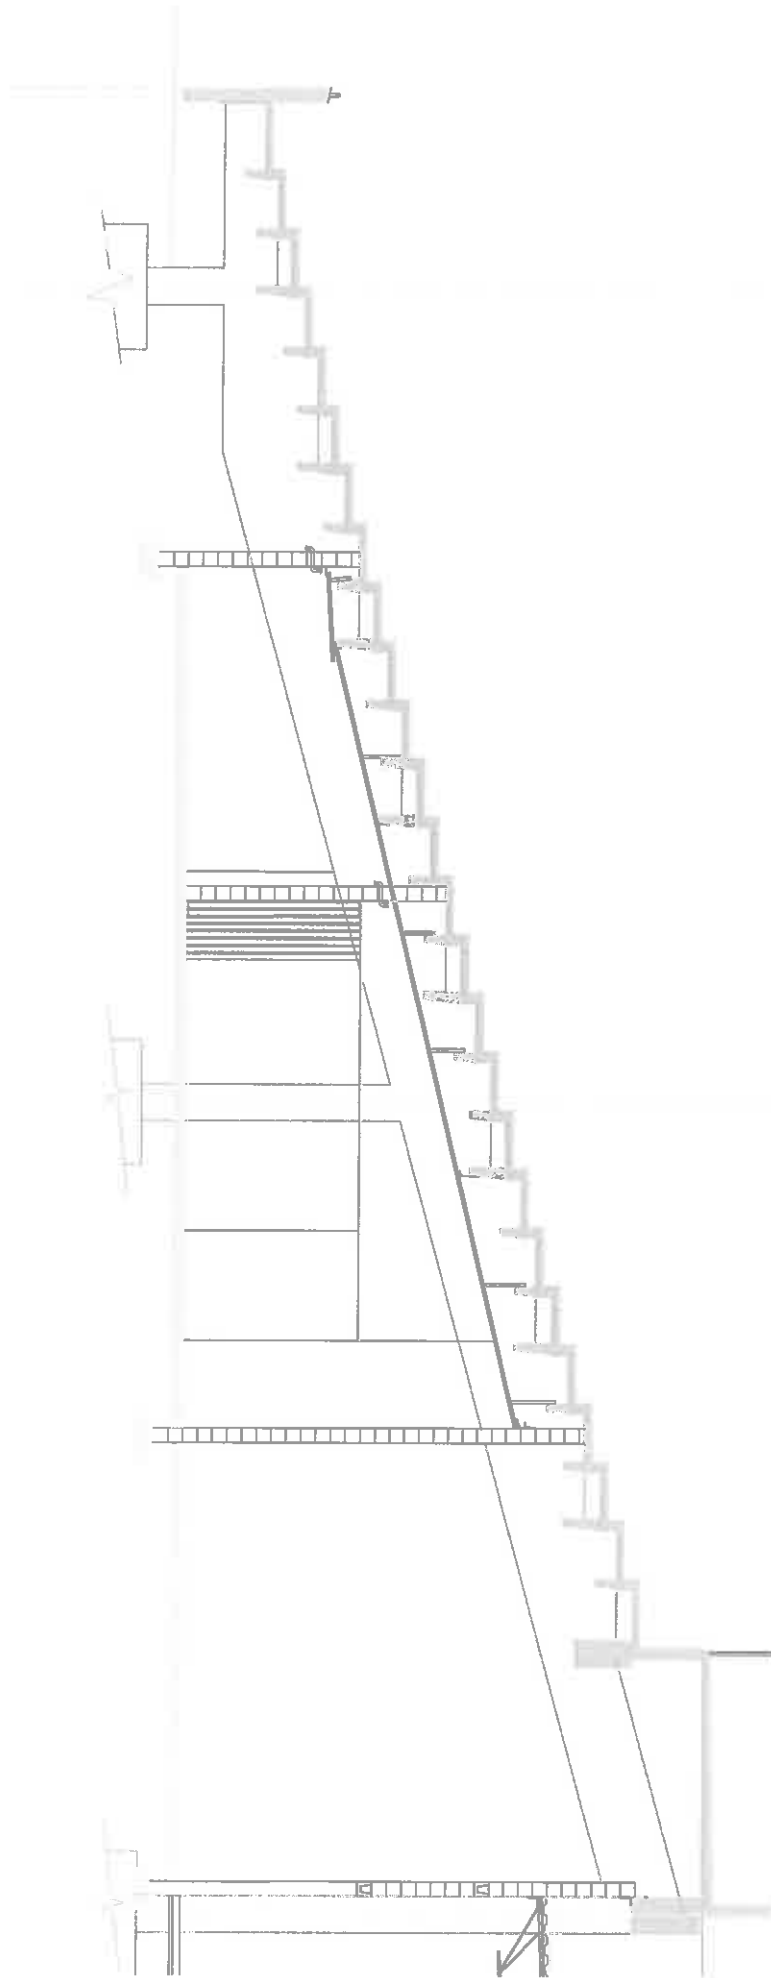

1/2" HULL ANCHOR
NOT TO EXCEED 2" EMB.
2-REQ'D.

